


**TABELLA DIMENSIONALE/ DIMENSIONS**

**MOD. QUADRUPLEX**

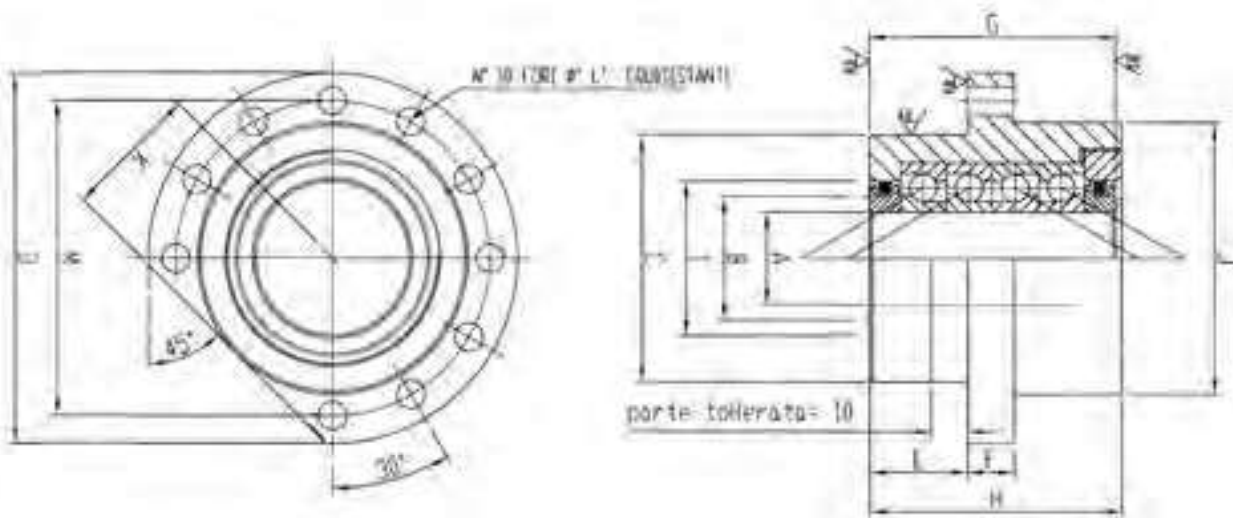

A-Ø Shaft	Quadruplex	A	B	C	D	E	F	G	H	I	J	K	L	M	C	Co	Pr	Vg
20	SUP20QC	20	26	60	90	32	13	74.26 72.74	77	36	64	32	6,6	76	2950	6760	460	3250
25	SUP25QC	25	34	80	120	32	15	80.26 78.74	82	40	88	44	9,2	102	3240	8480	560	2850
30	SUP30QC	30	41	80	120	32	15	82.26 80.74	82	50	88	44	9,2	102	3985	10800	720	2400
35	SUP35QC	35	46	90	130	32	15	84.26 82.74	86	60	98	49	9,2	113	4950	14200	950	2100
40	SUP40QC	40	55	124	165	43.5	17	104.26 102.74	106	66	128	64	11.4	146	6070	18200	1200	1900

C	Capacità di carico dinamico/ <i>Dinamic load capacity</i>	daN
Co	Capacità di carico assiale/ <i>Static load capacity</i>	daN
Pr	Precarico/ <i>Preload</i>	daN
Vg	Velocità massima con lubrificazione a grasso/ <i>Maximum speed with grease lubrication</i>	giri/min rpm